Installation Instructions for Standard and Extended Temperature

Industrial Series

Optical Liquid Level Sensors

GENERAL DESCRIPTION

The LLC Industrial Series liquid level sensor provides single point liquid detection via a TTL compatible output.

This sensor range was designed to directly switch incandescent indicators, sounders, relays or applications which require higher output power.

An infra-red LED and phototransistor accurately positioned at the base of the sensing tip ensure good optical coupling between the two when the sensor is in air. When the sensing tip is immersed in liquid, the infra-red light escapes from the cone causing a change in the amount of light detected at the phototransistor which makes the output change state. Various electrical outputs are available to suit different applications.

CLEANING

Proper fluids should be selected based on type of contamination to be removed. SST Sensing recommends freon and alcohol based solvents. DO NOT use chlorinated solvents such as tricholorethane as these are likely to attack the sensor material.

LIQUID MEDIA COMPATIBILITY

Before use check that the fluid in which you wish to use these devices is compatible with either polysulphone or trogamid.

ELECTRICAL SPECIFICATIONS

Supply Voltage (Vs)	+4.5 Vdc to +15.4Vdc or +8Vdc to +30Vdc
Supply Current (Is)	Max 2.5mA (Vs = 15.4Vdc) or Max 7.5mA (Vs = 30Vdc)
Output Type	An "L" in the part number after D3 indicates that the sensor output will be low in air. Otherwise the output will be high in air.
Output Sink and Source Current (lout)	1A
Operating Temperatures	-25°C to +80°C (Standard) -40°C to +125°C (Extended)
Storage Temperatures	-30°C to +85°C (Standard) -40°C to +125°C (Extended)


Output Voltage (Vout) Vs = 4.5 - 15.4Vdc lout = 1A	Output High Vout = Vs - 1.5V Max Output Low Vout = 0V + 0.5V Max
Output Voltage (Vout) Vs = 8 - 30Vdc lout = 1A	Output High Vout = Vs - 1.8V Max Output Low Vout = 0V + 0.7V Max
Output Voltage (Vout) Vs = 4.5 - 15.4Vdc and Vs = 8 - 30Vdc lout = 0mA	Output High Vout = Vs - 0.3V Max Output Low Vout = 0V + 0.1V Max

MOUNTING AND HOUSING TYPES

Housing Series	200 and 210 Series	600 and 610 Series	700 and 710 Series
Thread	M12x1x8g with Hex Nut*	½" SAE with O-Ring*	1/4" NPT
Tightening Torque	1.5 N m/13.26 in lb max. 7 bar max		
Pressure (when correctly sealed)			
Mounting Hole	Ø12mm	Ø ½ Inch	1/4" NPT Threaded
Housing Material	Polysulphone or Trogamid 20AWG, 250mm PTFE Wires, 8mm Tinned		
Sensor Termination			

^{*} Hex nut and o-ring sold separately, please contact us for details. NPT version can be sealed with PTFE tape.

Sensor Output Wiring




WIRE	WIRE DESIGNATION	
RED	Vs	
GREEN	OUTPUT	
BLUE	0V	



深圳市新世联科技有限公司

地址: 深圳市深南中路2066号华能大厦712室 邮编: 518031 电话: 0755-83680810 83680820 83680830 83680860 传真: 0755-83680866


PART NUMBERING SYSTEM

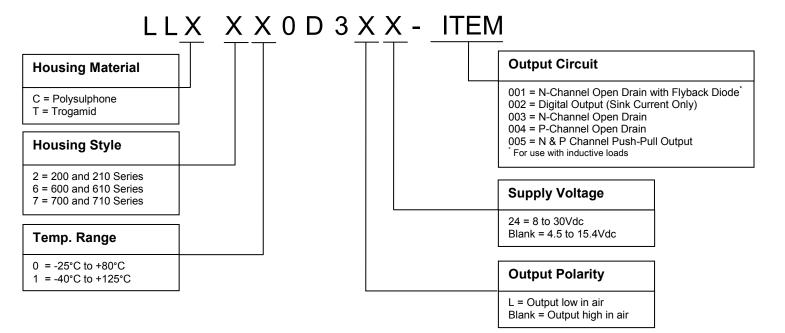



OUTPUT TYPES


In order to suit any application, these sensors have been designed with various output circuit configurations. They are identified by the a 3-digit code at the end of part number and are as follows:


ITEM = -002











深圳市新世联科技有限公司

邮编:518031

地址:深圳市深南中路2066号华能大厦712室

电话: 0755-83680810 83680820 83680830 83680860 传真: 0755-83680866

网址: www.apollounion.com 邮箱: sales@apollounion.com

PRODUCT DIMENSIONS

(all dimensions in mm)

M12x1 THREAD LLC200/210 Series Ø10.40 7.75 UNDERCUT FOR O-RING LLC600/610 Series 1/2" SAE-20 THREAD 2.50 11.70 1/4"NPT THREAD LLC700/710 Series 9.40 33.70

WARNING

Personal Injury

DO NOT USE these products as safety or

Emergency Stop devices or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.

CAUTION

Do not exceed maximum ratings.

Although the sensor is protected against supply reversal, it is not recommended.

Do not overtighten screw-in type.

Do not use chlorinated solvents.

Do not mount with dome pointing downwards.

Failure to comply with these instructions may result in product damage.

It is the customer's responsibility to ensure that this product is suitable for use in their application. For technical assistance or advice, please emails

深圳市新世联科技有眼公司

邮编: 518031

地址:深圳市深南中路2066号华能大厦712室

电话: 0755-83680810 83680820 83680830 83680860 传真: 0755-83680866

网址: www.apollounion.com 邮箱: sales@apollounion.com